



R Series Balances

Innovative Technology - Even More Possibilities

R series balances

Examine the enhanced possibilities of the innovative high-tech R series balances when it comes to balance operation and presentation of measurement results.

R series balances represent the standard level of precision balances. The series has been equipped with an easily readable LCD display providing you with even clearer result presentation. To maximize comfort of operation, the display has been enriched with an extra text line supplying you with either information or prompts on the weighing process (product name, tare value, etc.).

A pioneering innovation of R series balances is a set of symbols showing you a current working mode, type of connection with a computer, battery state, weighing and service functions. Additionally now there are even more weighing units at your disposal (g, mg, etc.). Weighing results are recorded in ALIBI memory.


The new series features plastic housing and a stainless steel weighing pan. With the possibility of weighbridge-free weighing (so called, under-pan weighing), wherein the load is suspended under the balance, the R series balances are an indispensable tool for any user.

Home screen

- A** Symbols
- B** Extra text line
- C** Direct access to databases
- D** Access to a particular working mode functions
- E** Working mode selection
- F** Direct start-up of balance adjustment procedure
- G** Transfer of display state to a peripheral device
- H** Navigation buttons



RSE

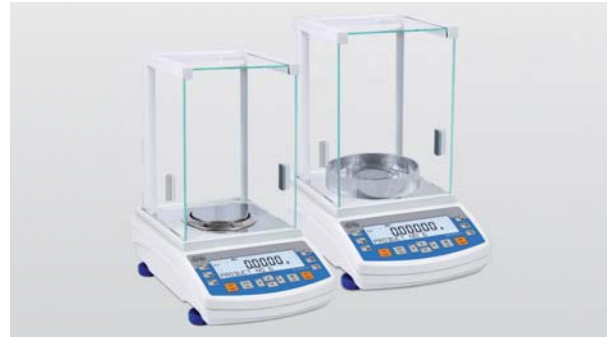

RIES

Quality and precision

Auto-Cal automatic system of adjustment procedure

Auto-Cal system is a tool for control and correction. It provides accurate weighing regardless of temperature variation, the position of the balance or changing environmental conditions. This allows the R series balances to offer accuracy in all conditions.




An in-built adjustment weight offers weighing accuracy in any working conditions.

The built-in adjustment weight has been designed to maintain accurate indications. Discover that with our automatic or semi-automatic adjustment procedure, performed periodically, you may grow confident about your weighing results' accuracy. The adjustment system guarantees that accurate weighing results are obtained even for challenging working conditions. It is used for GLP, GMP control procedures.

Repeatability of indications

The monolithic system ensures even greater accuracy and repeatability of weighing due to consolidation of elements of the balance's mechanical design. Using such technology results in higher quality balances.

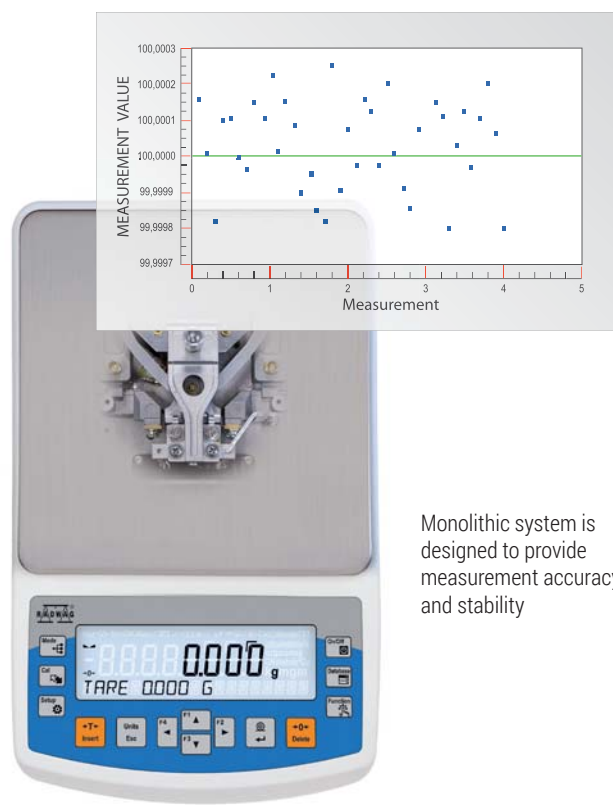


Monolithic system is designed to provide measurement accuracy and stability

Owing to the monolithic systems, R series balances offer fast measurement and excellent repeatability. These up-to-date design solutions, being highly resistant to transport shocks, are characterized by good metrological parameters.

Accuracy in all conditions

Operating temperature range

Now, owing to a wider working temperature range, you don't have to monitor and adjust the room temperature, affecting your balance stability, over and over again.

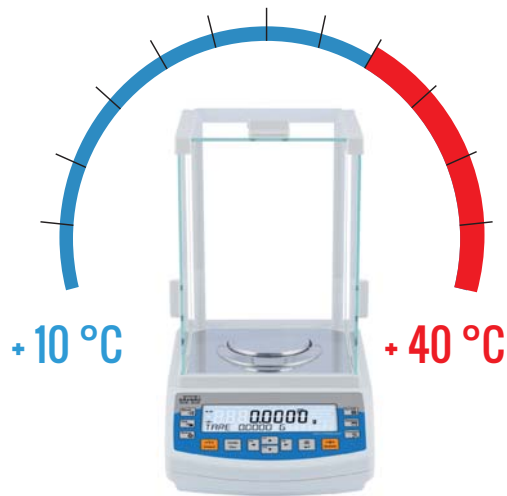

Resistance to ambient conditions

Increased resistance to fluctuating ambient conditions such as breezes and changes in humidity provides more accurate measurements.



Ambient conditions monitoring

Stable ambient temperature is a key factor when it comes to accuracy of balance indications. The R series balances feature an ergonomic diagnostic tool, namely, automatic monitoring of your balance temperature. Dynamics of balance temperature variation is registered online. When limit values have been exceeded, a thermometer symbol is displayed on the balance screen. In these cases, it is advisable to stabilize the balance.

You may find ambient conditions monitoring especially useful when installing the balance at its place of use. This solution may also turn out to be exceptionally valuable when observing ambient temperature variation.



Functionality and ergonomics

Direct access to information

Direct access to functions and databases is possible through the quick access buttons on the display.



Database - direct access to database,
Function - direct access to basic functions,
F1 to F4 - programmable function buttons and menu navigation.

An extra text line

An extra text line provides you with either information or prompts on the weighing process, e.g. product name or tare value.



Communication interface



The exchange of database information between the devices has become even easier thanks to two USB ports (type A and B) and Wireless Module technology.

Databases ergonomics for your weighing process



You certainly will appreciate information system of R series balances. The system is based on 5 databases: users database (10 different operators), products database (1000 different products), weightings database (1000 different measurements), tares database (10 different packaging weights). When operating the new R series balances you can analyze particular measurements in details, export or import any data and exchange.

Weighing process visualization

Symbols and units

The R series offers a priceless set of intuitive symbols signalling current working mode, computer connection type, battery status, function that is in operation and much more. The symbols add to readout clarity, they provide maximum comfort of operation and increase of ergonomics. These symbols are not only helpful but offer a wider choice of units.



Bar Graph visual representation of load capacity

The bar graph indicates the load capacity change in real time. The bar graph can be operated for various working modes with

threshold markers, e.g. parts counting, dosing, percent weighing, animal weighing, statistics, totaling, peak hold or checkweighing.



Minimum value

Maximum value



Mass value lower than the value of minimum threshold



Minimum value

Maximum value



Mass value contained within thresholds



Minimum value

Maximum value



Mass value higher than the value of maximum threshold

Databases security


Data protection

Access to the secured sensitive data is only possible when logged in. The access rights for each operator are set up at the administrator level.




Archiving and data exchange

Save your data and transfer reports on performed processes and partial measurements to external devices via USB interface. This interface allows you to control the working process. Not only can you restore the data but also copy your settings from one balance to another.

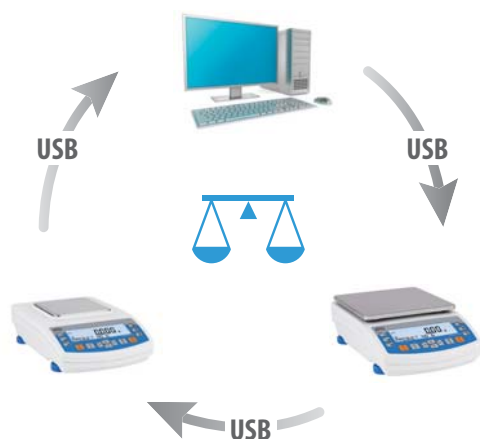

ALIBI memory

ALIBI memory is non-deletable storage, protecting weighing data. It has the capacity of up to 100 000 weighing records. This ensures both, security and flexibility of storing data over longer periods of time.

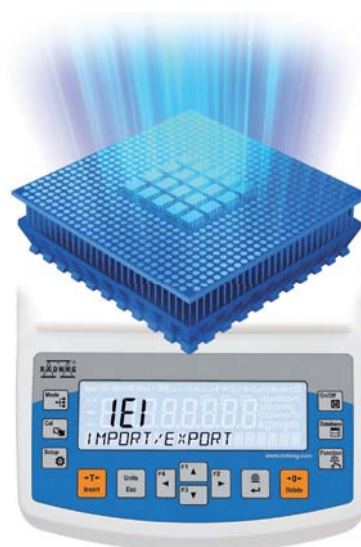

Export of data recorded in balance Alibi memory



Recording data on the USB flash drive.

C:\Users\USER\Desktop\12310000.xls												
No	Date and time	Serial number	User code	Product code	Result	Unit	Time	Precision	Number of test digit number	Last digit hidden	Stability	
[x] 1111	2014.01.03 12:19:18	12310000		UMH24	13.1048	inh	0.0000	4	0	No	No	
[x] 1112	2014.01.03 12:19:18	12310000		UMH24	17.1281	inh	0.0000	4	0	No	No	
[x] 1113	2014.01.03 12:19:19	12310000		UMH24	17.1273	inh	0.0000	4	0	No	No	
[x] 1114	2014.01.03 12:19:19	12310000		UMH24	17.1273	inh	0.0000	4	0	No	Yes	
[x] 1115	2014.01.03 12:19:20	12310000		UMH24	17.1273	inh	0.0000	4	0	No	Yes	
[x] 1116	2014.01.03 12:19:20	12310000		UMH24	9.9885	dm1	0.0000	4	0	No	Yes	
[x] 1117	2014.01.03 12:19:20	12310000		UMH24	9.9885	dm1	0.0000	4	0	No	Yes	
[x] 1118	2014.01.03 12:19:21	12310000		UMH24	9.9890	dm1	0.0000	4	0	No	No	
[x] 1119	2014.01.03 12:19:22	12310000		UMH24	399.50	dm2	0.00	2	0	No	No	
[x] 1120	2014.01.03 12:19:23	12310000		UMH24	399.50	dm2	0.00	2	0	No	No	
[x] 1121	2014.01.03 12:19:23	12310000		UMH24	399.50	dm2	0.00	2	0	No	Yes	
[x] 1122	2014.01.03 12:19:23	12310000		UMH24	399.52	dm2	0.00	2	0	No	Yes	
[x] 1123	2014.01.03 12:19:23	12310000		UMH24	399.52	dm2	0.00	2	0	No	Yes	
[x] 1124	2014.01.03 12:19:24	12310000		UMH24	199.79	g	0.00	2	0	No	No	
[x] 1125	2014.01.03 12:19:24	12310000		UMH24	199.81	g	0.00	2	0	No	No	
[x] 1126	2014.01.03 12:19:25	12310000		UMH24	199.82	g	0.00	2	0	No	No	
[x] 1127	2014.01.03 12:19:25	12310000		UMH24	199.80	g	0.00	2	0	No	No	
[x] 1128	2014.01.03 12:21:09	12310000	TSGE	UMH24	199.79	g	0.00	2	0	No	No	
[x] 1129	2014.01.03 12:21:09	12310000	TSGE	UMH24	199.79	g	0.00	2	0	No	No	
[x] 1130	2014.01.03 12:21:09	12310000	TSGE	UMH24	199.71	g	0.00	2	0	No	No	
[x] 1131	2014.01.03 12:21:10	12310000	TSGE	UMH24	199.74	g	0.00	2	0	No	No	
[x] 1132	2014.01.03 12:21:12	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	Yes	
[x] 1133	2014.01.03 12:21:12	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	Yes	
[x] 1134	2014.01.03 12:21:13	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	No	
[x] 1135	2014.01.03 12:21:13	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	No	
[x] 1136	2014.01.03 12:21:13	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	Yes	
[x] 1137	2014.01.03 12:21:14	12310000	TSGE	UMH24	0.19979	kg	0.00000	5	0	No	Yes	

Find out how useful ALIBI Reader PC software is. This application offers preview of all measurements recorded in balance Alibi memory. In addition, the software provides you with an option of printing and exporting selected data and with an option of generating reports in PDF and CSV format (MS Excel).

Reports and printouts

Configurable printouts

In the new R series balances the weighing reports are divided into 3 configurable sections, each of which can be fully customized.

Working mode	Weighing
Date	18.09.2016
Time	11:36:36
Balance type	AS 220.R2
Balance ID	2035
Product	PILL
Tare	0.5000 g
Gross weight	1.3020 g
Net weight	0.8020 g
User	Tom Smith
----- Calibration Report -----	
Calibration type	Internal
User	Tom Smith
Project	124/SGW/2016
Date	18.09.2016
Time	12:56:10
Balance ID	1035
Calibration difference	0.0000 g
Signature	


The new R series balances work with the printers that support PCL protocol. The printers are connected with the balances via USB interface.

Cooperation with PW-WIN / RAD-KEY PC Software


R series balances offer the possibility of sending printouts directly to PW-WIN and RAD-KEY PC Software. The measurements can be transferred via Wireless Module, RS232 or USB interface. Decide which one suits your needs the best and go.



RAD-KEY PC Software is designed to capture your balance data which is next inserted into a spreadsheet cell, for example.

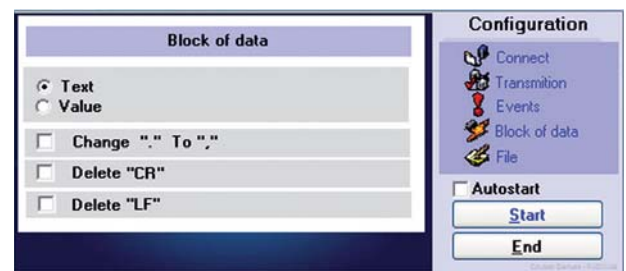

PW-WIN PC Software provides cooperation with RS232 and Ethernet interfaces, presents measurements in a visual form, produces statistics and exports data to a spreadsheet.

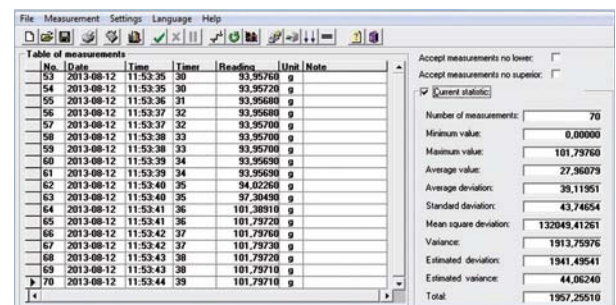A screenshot of the PW WIN software interface showing a 'Table of measurements'. The table has columns for No., Date, Time, Readings, Unit, and Note. It contains 70 rows of data. To the right of the table, there are statistics for the current data set, including minimum, maximum, average, and standard deviation values.

No.	Date	Time	Readings	Unit	Note
53	2013-08-12	11:53:35	38	93.95760 g	
54	2013-08-12	11:53:35	30	93.95720 g	
55	2013-08-12	11:53:36	31	93.95680 g	
56	2013-08-12	11:53:37	32	93.95680 g	
57	2013-08-12	11:53:37	32	93.95700 g	
58	2013-08-12	11:53:38	33	93.95700 g	
59	2013-08-12	11:53:38	33	93.95700 g	
60	2013-08-12	11:53:39	34	93.95680 g	
61	2013-08-12	11:53:39	34	93.95680 g	
62	2013-08-12	11:53:40	35	94.02260 g	
63	2013-08-12	11:53:40	35	97.30490 g	
64	2013-08-12	11:53:41	36	101.36810 g	
65	2013-08-12	11:53:41	36	101.79720 g	
66	2013-08-12	11:53:42	37	101.79760 g	
67	2013-08-12	11:53:42	37	101.79730 g	
68	2013-08-12	11:53:43	38	101.79720 g	
69	2013-08-12	11:53:43	38	101.79710 g	
70	2013-08-12	11:53:44	39	101.79710 g	

Accept measurements no lower: ☐

Accept measurements no superior: ☐

☒ Current statistic

Number of measurements: 70

Minimum value: 0.00000

Maximum value: 101.79760

Average value: 27.96079

Average deviation: 38.11951

Standard deviation: 43.74654

Mean square deviation: 132049.41261

Variance: 1913.79976

Estimated deviation: 1941.49541

Estimated variance: 44.06240

Total: 1957.25510

Technical specification



AS.R2



PS.R1



PS.R2

Max capacity [Max]	60 g - 310 g	110 g - 6000 g	200 g - 6000 g
Readability [d]	0.01 mg - 0.1 mg	1 mg - 100 mg	1 mg - 100 mg
Weighing pan size	ø90 mm, ø100 mm, ø85 mm (option)	128 × 128 mm, 195 × 195 mm	128 × 128 mm, 195 × 195 mm
Stabilization time	3.5 s - 6 s	1.5 s - 2 s	1.5 s - 2 s
Adjustment	internal (automatic)	external	internal (automatic)
Display	LCD (backlit)	LCD (backlit)	LCD (backlit)
Interfaces	2 × RS 232, USB-A, USB-B, Wireless Module (option)	2 × RS 232, USB-A, USB-B, Wireless Module (option)	2 × RS 232, USB-A, USB-B, Wireless Module (option)
Verification	●	○	●



Read QR code

and view complete
technical specification
of all R series balances



PC Software



Database Editor

Support of R series databases



PW-WIN

Cooperation of balance and computer



RAD-KEY

Capturing data from the balance to a spreadsheet



APP.R2

6 kg - 50 kg

0.01 g - 5 g

205 × 190 mm,
348 × 260 mm

2 s - 3 s

internal (automatic)

LCD (backlit)

2 × RS 232, USB-A,
USB-B, Wireless Module (option)



MA.R

Maximum capacity [Max]

50 g - 210 g

Readability [d]

0.1 mg - 1 mg

Weighing pan dimensions

ø90 mm, h = 8 mm

Moisture readout accuracy

0,0001 % - 0,001 %

Drying temperature range

max 160°C (option: max 250°C)

Heating module

IR emitter (option: halogen)

Display

LCD (backlit)

Communication Interfaces

RS 232, USB-A,
USB-B, Wireless Module (option)



Not applicable



Selected balance models



All balances

Functions and technical specification of device are subject to change without prior notice

Optional equipment

- Barcode readers,
- PLC Printers,
- USB keyboards,
- PC Software PW-WIN and RAD-KEY,
- Rack for under-pan weighing,
- Anti-vibration table,
- Anti-draft shield,
- LCD WD-6 display,
- Density determination kit (for solids and liquids).

Services

In order to support the new R series balances, RADWAG range includes:

- balances adjustment,
- validation IQ/OQ/PQ,
- periodic verification audits.

The availability of optional equipment depends on particular balance models AS.R, APP.R, PS.R and MA.R.



Features:



Large, easy to read display



Wide temperature range



Bar graph representing load capacity



Ambient conditions monitoring




Databases




Interfaces: RS232, USB and WiFi*

*option



ALIBI memory



Configurable reports and printouts

Functions:



Autotest



Checkweighing



Dosing



Pipettes calibration



Parts counting



Percent weighing



GLP Procedures



Statistics



Totalizing



Under-pan weighing



Animal weighing



Density Determination